



TH

10.62 P



CONSTRUCTION



LOGISTICS



EVENTS AND
FILM

TH
10.62 P



CAB

Best-in-class
safety and visibility



PERFORMANCE

Unrivaled lifting
performance




LOAD LIVE DIAGRAM


Two real-time dynamic
load charts

TH 10.62 P


DIMENSIONS (ft and in)

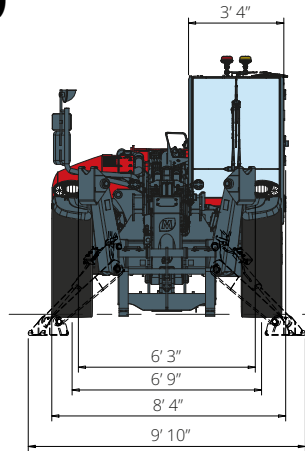

FRONT
view

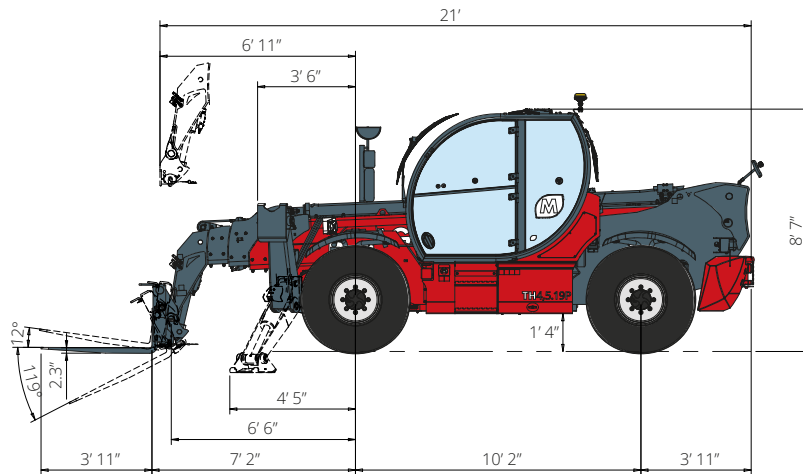


SIDE
view

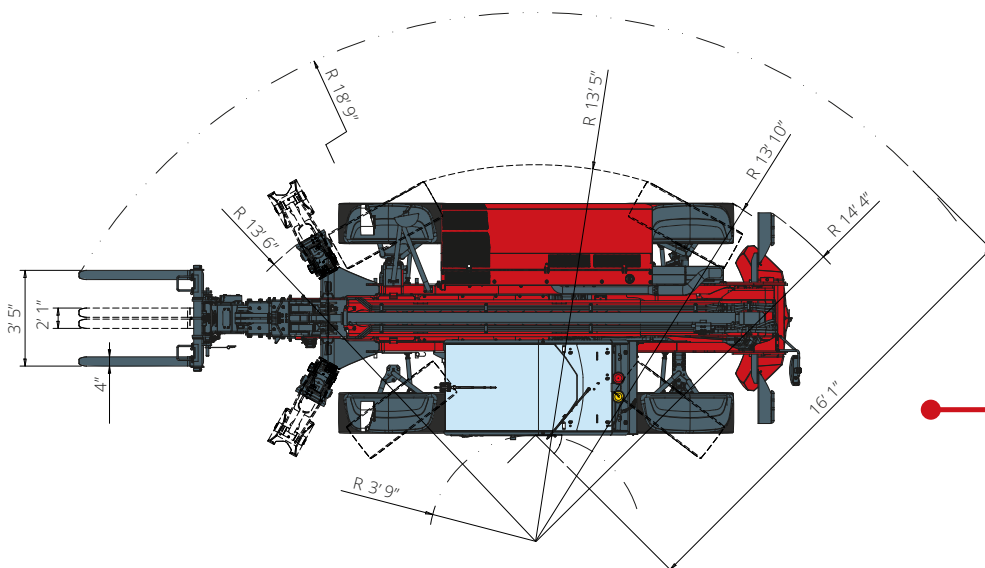

TOP
view


Load chart with
FULLY EXTENDED STABILIZERS

ATT-08-014

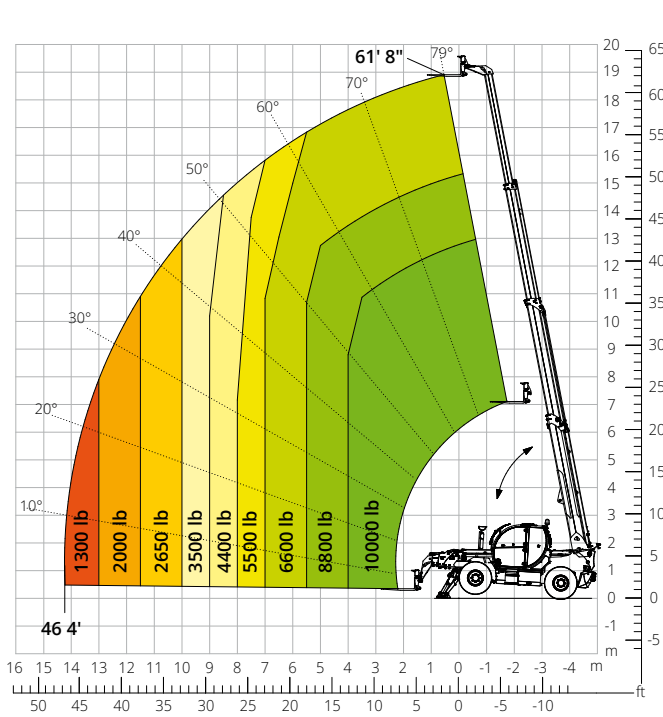


Load chart
FRONT ATTACHMENT ON TIRES

ATT-08-014

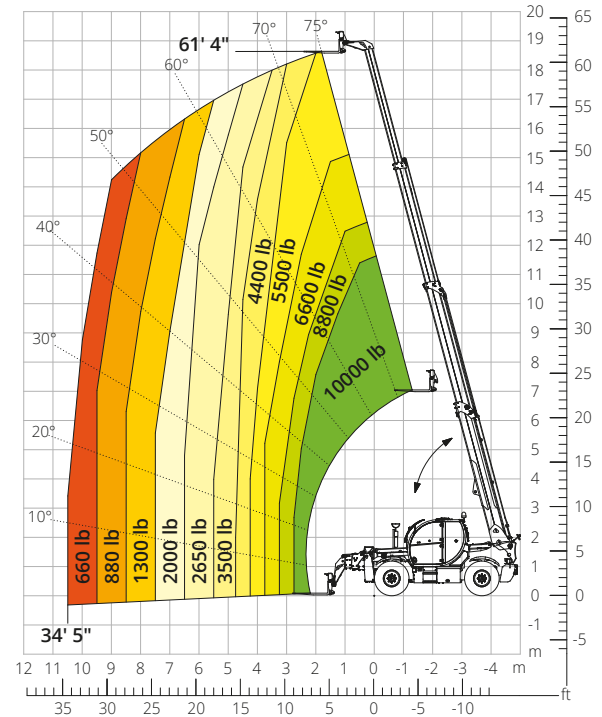


Load chart with
WINCH, 7,700 lb

ATT-02-022

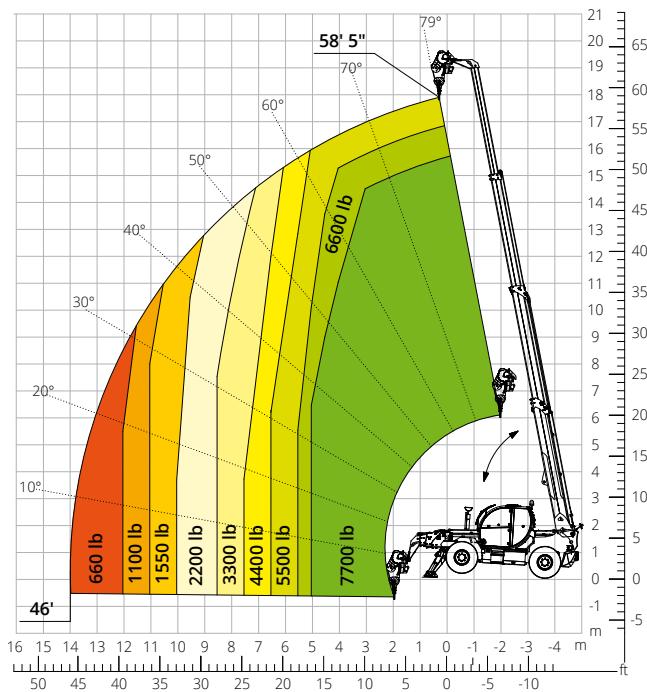


Load chart with
WINCH, 11,000 lb

ATT-02-019

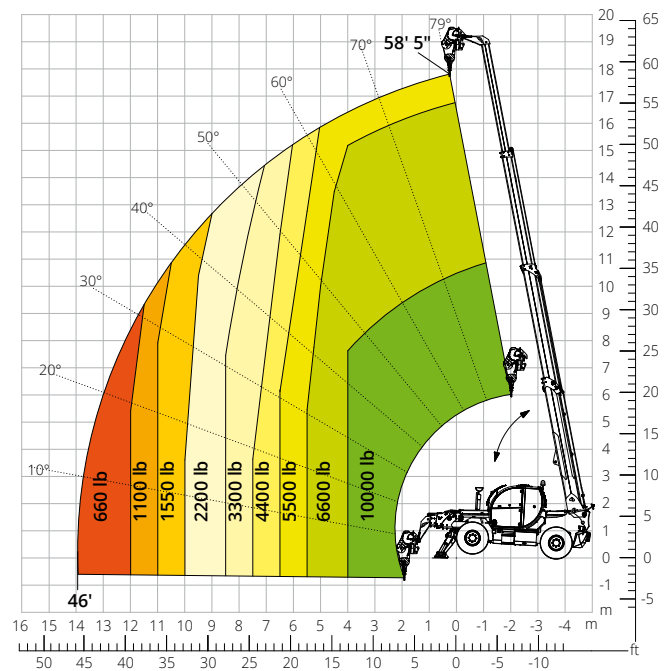


Load chart with
JIB WITH WINCH, 3,300 lb

ATT-04-011

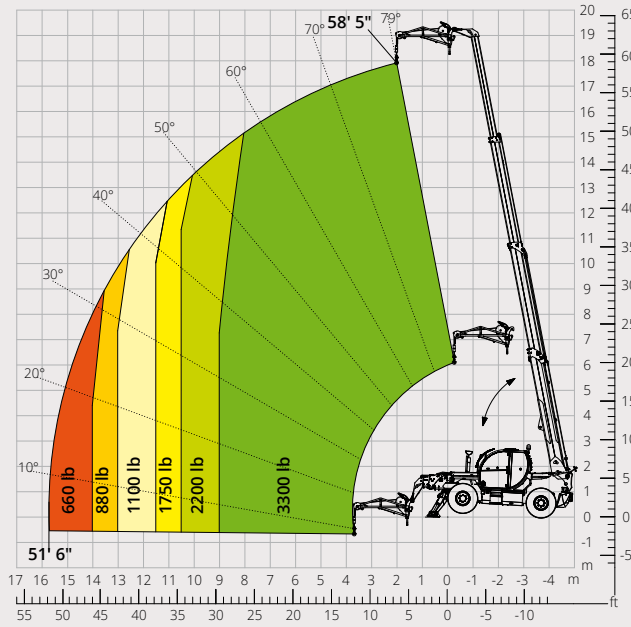


Load chart with
JIB WITH WINCH, 4,400 lb

ATT-04-015

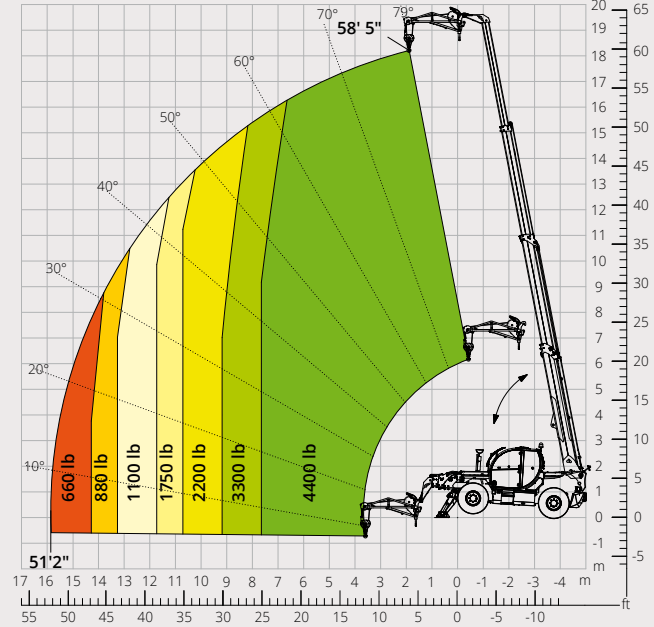


Load chart with
JIB 4,400 lb

ATT-04-013

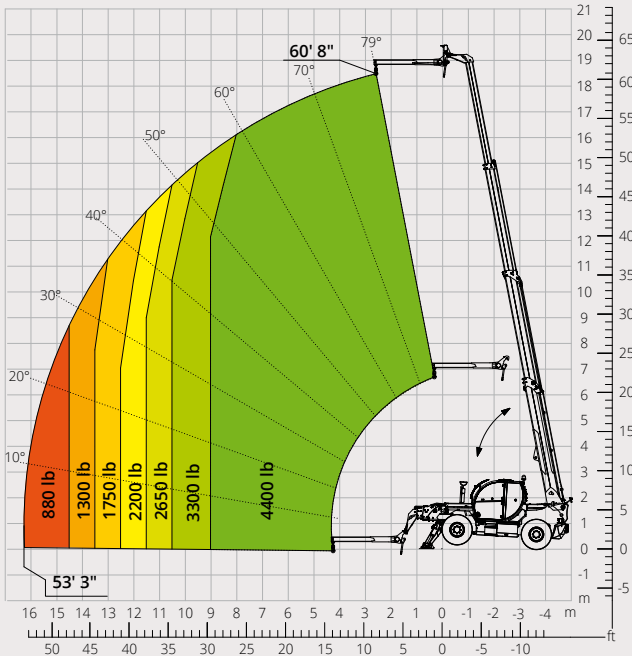


Load chart with
HOOK, 11,000 lb

ATT-05-001

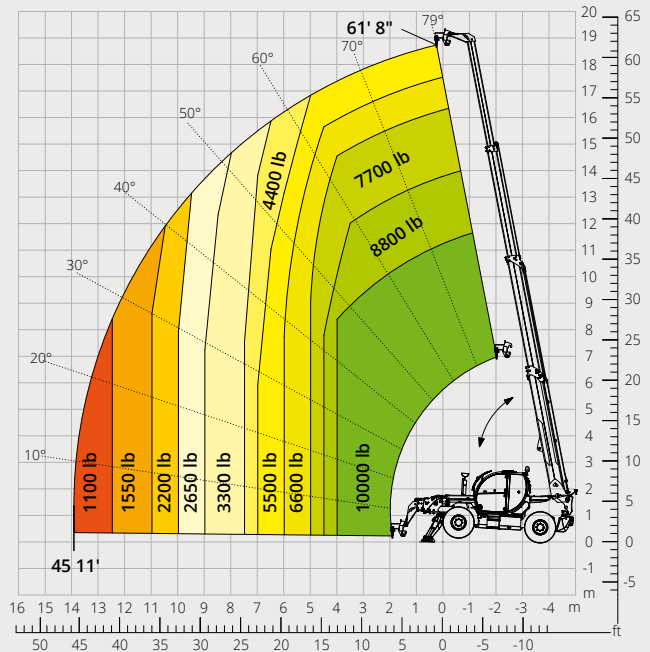


Load chart with
ROTATING EXTENDABLE PLATFORM, 2,200 lb

ATT-01-016

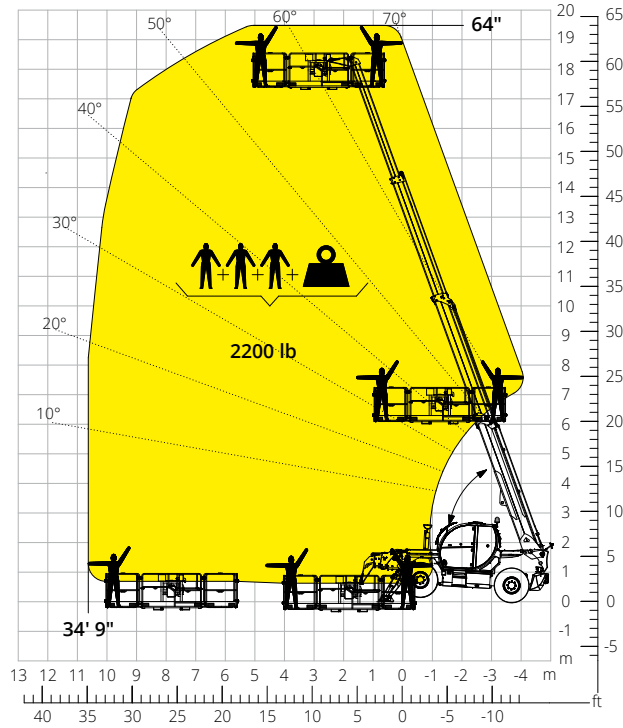


Load chart with
ROTATING NON-EXTENDABLE PLATFORM, 550 lb

ATT-01-003

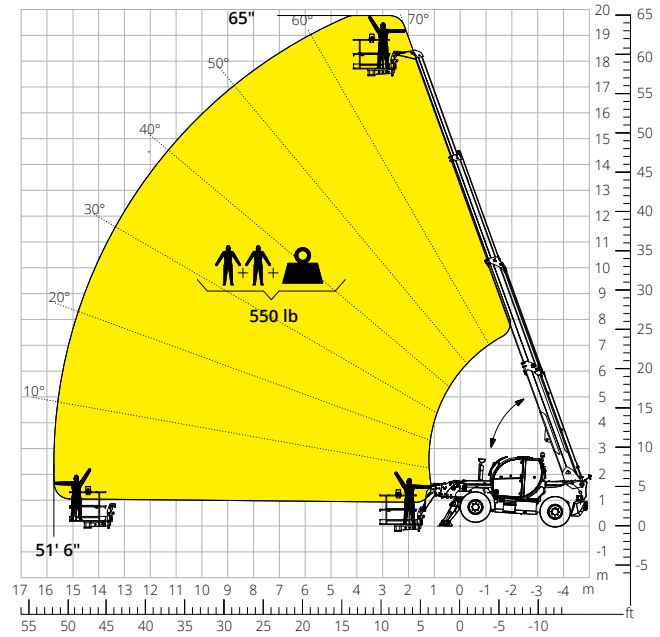


Load chart with
FIXED PLATFORM, 550 lb

AT-01-001

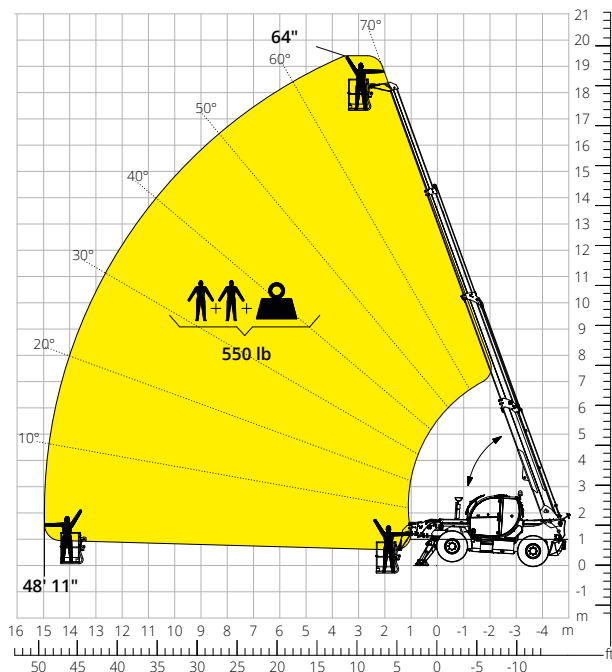

Load chart with
PLATFORM, 1,000 lb, FOR MINES

ATT-01-027

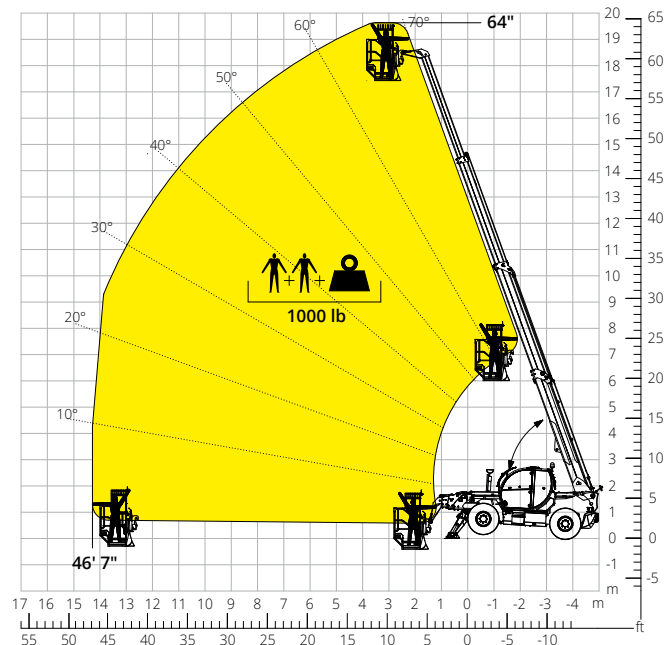

Machine model	Telescopic handler	TH 10.62 P	
	Maximum lifting capacity	10,000 lb	
	Maximum lifting height	61' 8"	
	Maximum reach	46' 9"	
Stabilizers	Type	Pivoting	
Engine	Model	Deutz TCD 3,6 L4 EDG - Stage IIIA	Deutz TCD 3,6 L4 Stage V
	Rated power	74.4 kW (101.2 hp) at 2,200 rpm	
	Maximum torque	302 lb/ft at 1,600 rpm	
	Displacement	219.7 in ³	
	Cylinders	4 in line	
	Engine configuration	Turbocharged direct injection diesel	
	Cooling system	Water – intercooler	
Transmission	Type	Hydrostatic	
	Maximum pressure	530 bar	
	Gear box	Dropbox, 2 speeds forward-reverse	
Axles and brakes	Type	Axles with planetary gearboxes	
	Front axle	Oscillating and steering with levelling, +/-8°	
	Rear axle	Oscillating and steering with hydraulic lock	
	No. of driving/steering wheels	4WD - 4WS	
	Steering mode	Frontal/Concentric/Crab	
	Service brake	Wet multi-disk on front and rear axle	
	Parking brake	Hydraulic with negative action on front axle	
Performance	Tyre sizes	445/65 R22.5	
	Max. travel speed	21 mph	
	Gradeability (unladen)	58%	
	Turning radius (at forks)	18'10"	
Weights	Total unladen*	28,000 lb	
Tank and system capacities	Diesel fuel	52.8 U.S. gal	
	AdBlue	2.64 U.S. gal	
	Hydraulic fluid	24.6 U.S. gal	
	Engine oil	2.4 U.S. gal	
	Coolant	5.3 U.S. gal	
Hydraulic circuit for movements	Circuit type	Load sensing	
	Service pump	Variable displacement	
	Max. hydraulic flow rate	31.7 U.S. gpm	
	Max. boom head flow rate	19.8 U.S. gpm	
	Max. operating system pressure	350 bar	
	Controls for boom movements	SIL 2 electro-proportional valve	
Standard met	Movements control	1 joystick with integrated manoeuvre enable	
		2006/42/EC: EU Machinery Directive	
		2016/1628: EU Regulation on the emissions of stage V engines	
		EN 1459-X: Relating to standards on the safety requirements for variable reach machines	
		EN 280-1/EN 280-2: standards relating to mobile elevating work platforms (if available)	
	ROPS/level 2 FOPS: relating to the standards for protective structures		

*The data given in this brochure are provided for information purposes and are subject to change without prior notice.
All images are purely guideline and might not give an exact representation of the product.
the stated weight refers to the vehicle unladen with standard equipment and may vary depending on the chosen configuration.

The standard machine configuration includes:

CAB

- Comfort seat with adjustable headrest
- Adjustable steering column
- Analogue joypad
- Adjustable sunblind
- Heating
- Air conditioning
- FM/AM radio with USB and Bluetooth connectivity
- Ambient LED lights
- USB Type-A and Type-C (5 V) inputs

REAL TIME INFORMATION

- Touchscreen, 7"
- MCTS – Magni Combi Touch System on-board software
- Automatic RFID tools recognition system
- LMI – Load Moment Indicator
- LLD – Live Load Diagram
- Onboard and remote integrated diagnostics

TECHNICAL SPECIFICATIONS

- Q-Fit standard
- Provision for platform
- Advanced three-line CAN BUS system
- Automatic levelling system for outriggers
- Automatic front and rear wheel alignment
- Automatic parking brake
- Mechanical battery cut-off in engine compartment
- Electrical system: 24 V – IP67

SERVICE

- Warranty: 24 months/2,000 hours